



Paper id: 250782

Printed Page: 1 of 3
Subject Code: BEC602

Roll No:

| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

BTECH
(SEM VI) THEORY EXAMINATION 2024-25
CONTROL SYSTEM

TIME: 3 HRS

M.MARKS: 70

Note: Attempt all Sections. In case of any missing data; choose suitably.**SECTION A****1. Attempt all questions in brief.****02 x 7 = 14**

| Q no. | Question | CO | Level |
|-------|--|----|-------|
| a. | Compare between open loop & closed loop system. | 1 | 2 |
| b. | Define transient response and steady state response of a system. | 3 | 1 |
| c. | Write short note on Kalman's test. | 2 | 2 |
| d. | The open loop transfer function of unity feedback system is given by $G(s) = \frac{50}{(1+0.1s)(s+10)}$ Determine the K_p & K_v . | 3 | 3 |
| e. | Check the stability of the system whose characteristic equation is given by $2s^4 + 2s^3 + s^2 + 3s + 2 = 0$ | 4 | 4 |
| f. | Explain the term (i) asymptotes (ii) centroid. | 4 | 2 |
| g. | Define relative and absolute stability. | 5 | 1 |

SECTION B**2. Attempt any three of the following:****07 x 3 = 21**

| | | | |
|----|---|---|-----|
| a. | Draw the block diagram and derive the transfer function of armature controlled dc motor. | 1 | 3 |
| b. | A system is described by the matrices $A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & -2 & 3 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}, C = [1 \quad 2 \quad 0]$ Determine the transfer function. | 2 | 3 |
| c. | Consider a unity feedback control system with the closed loop control function $\frac{C(s)}{R(s)} = \frac{Ks + b}{s^2 + as + b}$ Determine the open loop transfer function. Show that the steady state error in the unit ramp input response is given by $e_{ss} = \frac{a - k}{b}$ | 3 | 4 |
| d. | Explain concept of stability in detail and also explain the effect of location of poles on stability. | 4 | 2,4 |
| e. | Sketch the bode plot for the transfer function (on semi log paper) $G(s) = \frac{1000}{s(1 + 0.1s)(1 + 0.001s)}$ | 5 | 4 |

SECTION C**3. Attempt any one part of the following:****07 x 1 = 07**

| | | | |
|----|---|---|---|
| a. | Determine the ratio $C(s)/R(s)$ for the system shown in figure: | 1 | 3 |
|----|---|---|---|



Paper id: 250782



Roll No:

| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

BTECH
(SEM VI) THEORY EXAMINATION 2024-25
CONTROL SYSTEM

TIME: 3 HRS

M.MARKS: 70

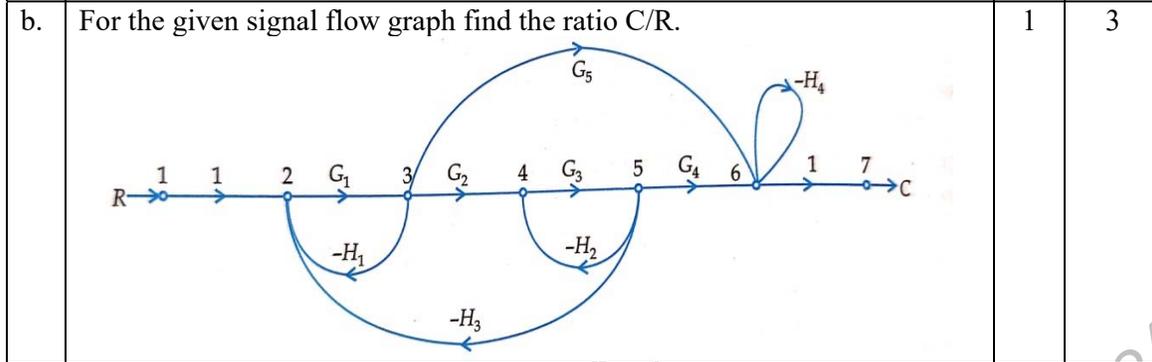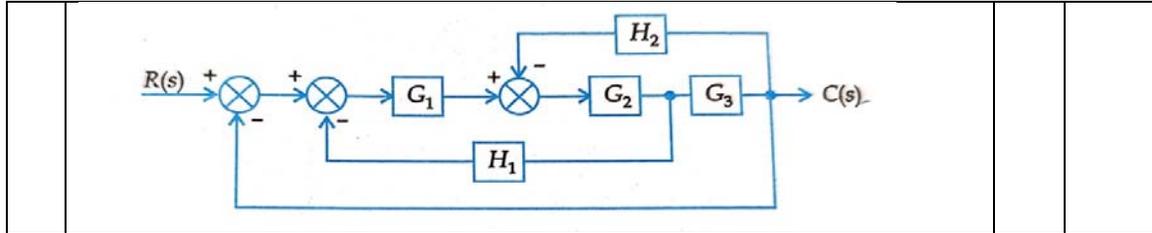

4. Attempt any one part of the following: 07 x 1 = 07

a. Consider the following system
$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} -0.5 & 0 \\ 0 & -2 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t)$$
$$y(t) = [0 \quad 1] \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

Test for controllability and observability.

b. A system is described by the following transfer function
$$G(s) = \frac{20(10s + 1)}{s^3 + 3s^2 + 2s + 1}$$

Find the state and output equation of the system.

5. Attempt any one part of the following: 07 x 1 = 07

a. The open loop transfer function of a servo system with unity feedback is given by
$$G(s) = \frac{10}{(s + 2)(s + 5)}$$

Determine the characteristic equation of the system, damping ratio, undamped natural frequency of oscillation. What is the percentage overshoot of the response to a unit step input.

b. Derive the expression for response of first order system with unit step input.

6. Attempt any one part of the following: 07 x 1 = 07

a. For a unity feedback system the open loop transfer function is given by
$$G(s) = \frac{k}{s(s + 2)(s^2 + 6s + 25)}$$



Paper id: 250782

Printed Page: 3 of 3
Subject Code: BEC602

Roll No:

| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

BTECH
(SEM VI) THEORY EXAMINATION 2024-25
CONTROL SYSTEM

TIME: 3 HRS

M.MARKS: 70

| | | | |
|--|--|--------------------|-----|
| | Sketch the root locus. (on graph paper) | | |
| b. | Explain Routh Hurwitz's stability criteria. For a system with characteristic equation $s^6 + 3s^5 + 4s^4 + 6s^3 + 5s^2 + 3s + 2 = 0$, examine stability | 4 | 4,5 |
| 7. Attempt any one part of the following: | | 07 x 1 = 07 | |
| a. | Sketch the polar plot of $G(s) = \frac{10}{s(s+1)}$ | 5 | 4 |
| b. | With a suitable diagram define: (a) Phase crossover frequency (b) Gain crossover frequency (c) Phase Margin (d) Gain margin | 5 | 3 |

QP25EP1_290
/ 06-Jun-2025 1:38:15 PM | 117.55.242.134